

Specifications

Items		Specifications
Heads	Type	Piezo electric drop on demand
		180 nozzles × 8 colors × 2 line staggered layout
Printing mode*1	Height	Stepless adjustable Max.3~10 mm (0.11"~0.39")
	Pass	2 / 3 / 4 / 6 / 8 / 12 / 16 pass
	Direction	Uni / Bi Direction
	Scan Speed	Normal / High
	Resolutions	720 dpi × 720 dpi, 360 dpi × 720 dpi, 360 dpi × 540 dpi, 360 dp i× 360 dpi
Printing accuracy	Distance accuracy	±0.5 mm (0.020") or 0.3% whichever is larger
	Perpendicularity	±0.5 mm / 1,000 mm (±0.02"/139.4")
Inks	Type	Reactive Dye / Acid Dye
	Quantity	16 cartridges
	Supply	Tube from Ink cartridge to head   Ink End detection
	Capacity	Usable amount 200 cc per one cartridge
Max print size		1,620 mm (64 inch)
Media	Size	Max.1650 mm (65") / Min.200 mm (7.9")
	Set Method	Manual by Media Set Lever
	Print Face	Face In / out
	External Diameter	Max.180 mm (7")
	Core Diameter	76.2 mm (3") / 50.8 mm (2") / 34.3 mm (1.35")
	Weight	Max.15 kg (33 lbs)
	Type	Cotton / Silk (Pre-Treatment) *2
Take-up device		Motor controled automatic media take-up device
Interface		IEEE1394 / IEEE1284
Applicable standard		VCCI Class A   FCC Class A   UL 60950-1   CE Marking (EM Directive Low voltage Directive)   CB Report   RoHS Directive
Power		AC100V~AC240V±10% (Automatic change)   50/60Hz±1Hz
Power consumption		Less than 500VA
Operational environments	Acceptable Temp	15℃~30℃ (59°F~86°F)
	Accuracy Guarantee Temp	18℃~25℃ (64°F~77°F)
	Grade temperature	Less than±10℃/h
	Relative humidity	35~65%Rh (No condensation)
	Dust	Office Level
Dimension / Weight		2,750 mm (108") <W> × 710 mm (28") <D> × 1,320 mm (52") <H> / Less than 150kg (330 lbs)


\*1:Some combinations of Pass, Direction, Scan Speed, Resolutions are not supported  
\*2:Fabrics will require post print processing such as steaming, washing etc, Fabric with high amounts of expansion caused by moisture or of a coarse texture cannot be used,  
\*Specifications are subject to change without notice.

Ink Cartridges

Discriptions		
Color	Reactive Dye	Acid Dye
Black	SPC-0357K	SPC-0355K
Yellow	SPC-0357Y	SPC-0355Y
Magenta	SPC-0357M	SPC-0355M
Cyan	SPC-0357C	SPC-0355C
Light Magenta	SPC-0357LM	SPC-0355LM
Light Cyan	SPC-0357LC	SPC-0355LC
Grey	SPC-0357GR	SPC-0355GR
Blue	SPC-0357BL	SPC-0355BL
Red	SPC-0357R	SPC-0355R
Orange	SPC-0357OR	—
Golden Yellow	SPC-0357GY	—

●All trademarks or registered trademarks are the property of the respective owners

External Dimensions

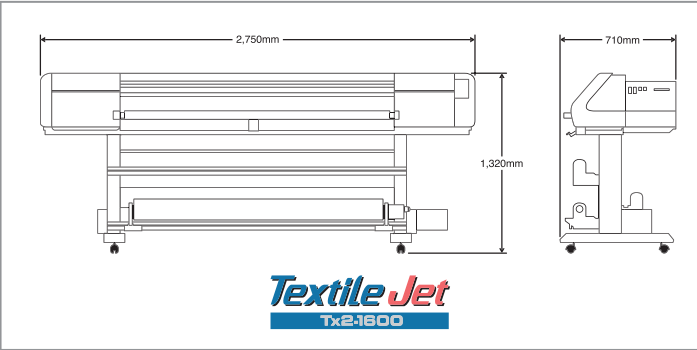

Inkjet Plotter for Digital Printing to Textile

Textile Jet

Tx2-1600

Mimaki



Digital printing from sample creation to small lot production...  
The Mimaki TX2 is the industry standard digital textile printer with high quality 720dpi output.

MIMAKI ENGINEERING CO., LTD.

TKB Gotenyama Bldg. 5-9-41 Kitashinagawa Shinagawa, Tokyo 141-0001, Japan Tel: +81-3-5420-8671 trading@mimaki.co.jp www.mimaki.co.jp

MIMAKI USA, INC.

140 Satellite Boulevard NE, Suwanee, Georgia 30024-7128 Atlanta +1-888-530-3988 Boston +1-888-530-3986 Los Angeles +1-888-530-3987 Chicago +1-888-530-3985 www.mimakiusa.com

MIMAKI EUROPE B.V.

Joan Muyskenweg 42-44, 1099CK Amsterdam, The Netherlands Tel: +31-20-4627-640 www.mimakieurope.com




All our products are manufactured under our quality assurance system certified by ISO9001  
printed in Japan DB3-0244-01




## 8-Color Ink Realizes Accurate Sharp Color Reproduction

The TX2-1600 can mount ink variations for a total of 8 colors including 4 basic colors (CMYK) and 4 special colors. Ink that suits your application can be selected from reactive and acid dye ink variations.




## 8-Color multi-head enables switching between 1-way and 2-Way Print Modes

The TX2-1600 employs an 8-Color multi head with the front and rear heads set in a staggered arrangement. The front and rear heads are fed with an independent ink supply system, allowing the selection of 1-way print mode with the same ink type used or 2-way print mode with inks of different types used.

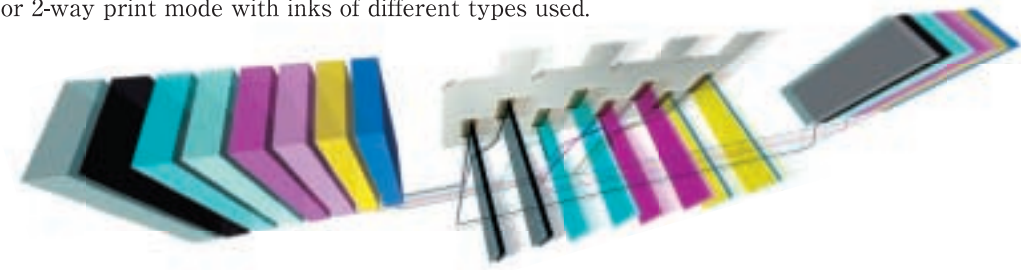

## High speed printing realizes high performance


The high speed print head enables 28.4m<sup>2</sup>/h high speed and 720dpi high quality printing which dramatically increases the potential to deliver digitally printed textiles - from sample creation to small lot production.

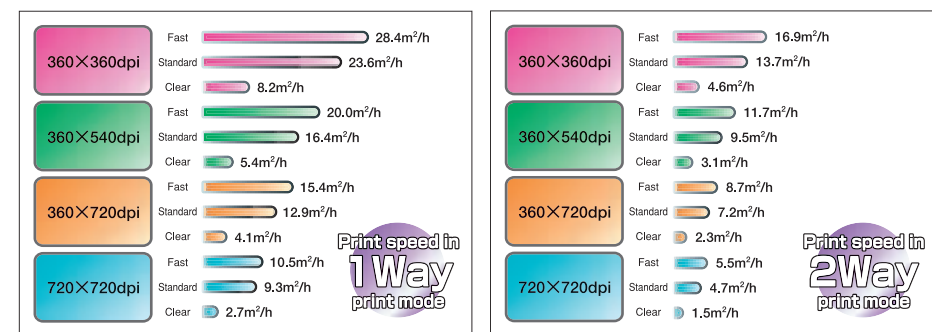

\*Print Width 1600mm, Bi-Directional  
\*Print resolution and print speed may be restricted according to the kind of fabric, and the state of a pretreatment.

## Head height adjustment mechanism enables printing fabrics up to 7mm thick

The head height adjustment mechanism enables printing to thick cloths with stepless adjustment of up to 7mm. The TX2-1600 features a plunger which easily determines the head height position.

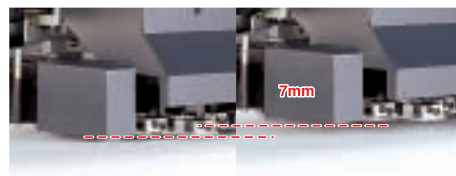

## Unique Feed Mechanism


The drive roller and friction roller allow a constant tension of fabric, enabling printing to fabrics without any liner sheet (backing sheet). Ink penetrating the fabric is received by the ink trough to allow printing to a coarse-textured fabric. The Fabric Retainer for holding both edges of the fabric prevents contact of the fabric and print head.



\*The Fabric Retainer is applicable to up to 5.5mm thickness.  
\*The ink ditch can be washed with water.

## Anti-Meandering Loading Device

The TX2-1600 employs a fabric loading device which minimizes meandering of the cloth by detecting the edge of the roll with a sensor and moving from side to side.

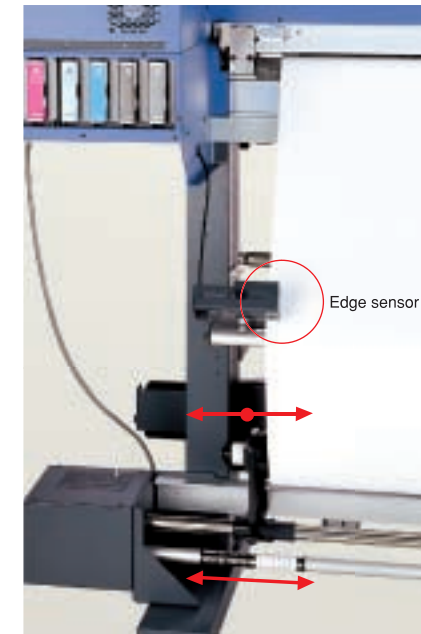


## Automatic Take-Up Device as Standard

The TX2-1600 is provided with an automatic takeup device as standard which takes up the printed fabric with a constant tension, realizing overnight operation and unattended printing. The TX2 is also provided with an additional roll holder for setting a slip sheet that prevents ink penetration.



## Easy-to-Use Operation Panel

The backlit, two row display panel is employed to provide substantial and legible information display in any environment. For easy operation, frequently used keys such as TEST, CLEANING and DATA CLEAR are arranged at the top of the keypad.

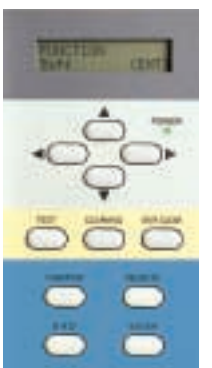

## IEEE1394 port enables high speed communion

The IEEE1394 interface realizes high speed data transmission without reducing throughput - even at the highest speeds of printing.

